
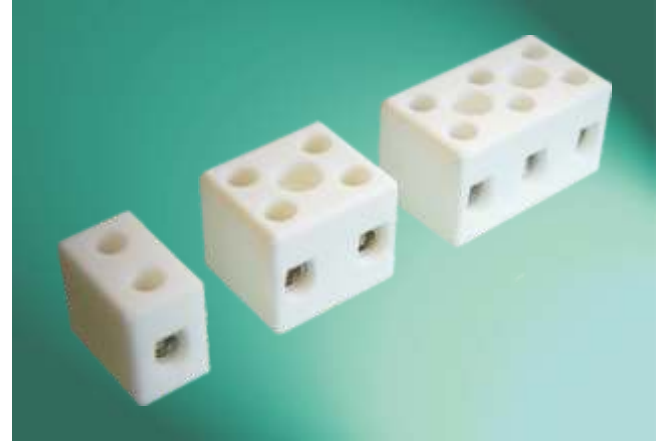


## YÜKSEK ISIYA DAYANIKLI PORSELEN KLEMENSLER

## SPECIFICATIONS

**INSERTS:** NICKEL PLATED BRASS  
**HOUSING:** PORCELAIN (GLAZED OPTION)  
**TEMP.:** 800°C (HOUSING), 350°C (INSERTS)  
**SCREWS:** GALVANISED STEEL  
**STANDARD:** CE (BS EN 60998)  
**COLOUR:** WHITE  
**FEATURE:** HARD & SOLID  
 VERY HIGH TEMPERATURE  
 NON-INFLAMMABLE  
 RESISTANT TO CHEMICALS

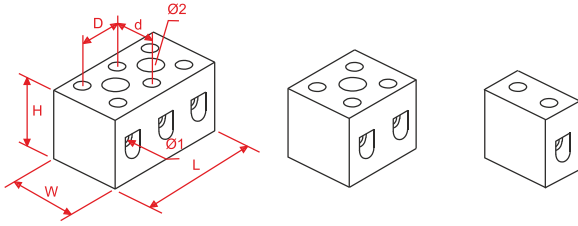

Ease Code	Cross Section	Current Range	Rated Voltage	Dimensions (mm)							USD/Adet \$
				W	L	Ø <sub>1</sub>	Ø <sub>2</sub>	D	d	H	
CP0-5A1P	4mm <sup>2</sup>	5-32 A	450 V	13	12	3.2	-	-	8.0	16	*
CPO-5A-2P	4mm <sup>2</sup>	5-32 A	450 V	18	21	3.2	4.5	12	8.0	16	0,55 USD
CPO-5A-3P	4mm <sup>2</sup>	5-32 A	450 V	18	33	3.2	4.5	12	8.0	16	*
CPO-10A-1P	6mm <sup>2</sup>	10- 57 A	450 V	19	9.0	2.8	-	-	9.0	18	*
CP0-10A-2P	6mm <sup>2</sup>	10- 57 A	450 V	19	22	2.8	4.0	13	9.0	18	0,77 USD
CP0-10A-3P	6mm <sup>2</sup>	10- 57 A	450 V	19	36	2.8	4.0	13	9.0	18	*
CP0-15A-1P	10mm <sup>2</sup>	15- 57 A	450 V	21	13	4.3	-	-	10	20	*
CPO-15A-2P	10mm <sup>2</sup>	15- 57 A	450 V	21	24	4.3	4.8	14	10	20	0,93 USD
CPO-15A-3P	10mm <sup>2</sup>	15- 57 A	450 V	21	36	4.3	4.8	14	10	20	*
CPO-30A-1P	16mm <sup>2</sup>	30- 57 A	450 V	27	15	6.1	-	-	12	22	*
CPO-30A-2P	16mm <sup>2</sup>	30- 57 A	450 V	27	31	6.1	5.0	17	12	22	1,40 USD
CPO-30A-3P	16mm <sup>2</sup>	30- 57 A	450 V	27	48	6.1	5.0	17	12	22	*

\* Özel sipariş üzerine getirilir.

## TUBOTHAL TAŞLAR




ÖLÇÜ	DELİK ADEDİ	KANAL ÇAPI	EURO / 1 ADET
80/68x15 mm	20	7,50 mm	2,95 €
89/78x15 mm	20	8,00 mm	3,15 €
110/88x14 mm	20	8,50 mm	4,20 €